

Iper congelatori per gelato e laboratori (-45°C) / Hyper freezers for ice-cream and laboratories (-45°C) /
Iper congélateurs pour crème glacée et laboratoires (-45°C) / Iper Kühltruhen für Eis und Labor (-45°C)
Iper congeladores para helado y laboratorios (-45 °C)

ELVT 510

NEW

OSPEDALI



LABORATORI



PESCE SURGELATO



GELATI



Nei laboratori e per conservare speciali tipi di gelato, la bassa temperatura è spesso essenziale. Se volete preservare il pesce per il sushi, basse temperature stabili sono la migliore garanzia per mantenere una alta qualità. La gamma ELVT di Cold Master offre temperature di -45°C per freezer da 284 a quasi 500 lt. La temperatura è tenuta ad un livello costante e può essere facilmente monitorata sul display digitale. La centralina può essere programmata ed offre inoltre la possibilità di aggiungere un allarme esterno. L'isolamento di 100 mm di schiuma di poliuretano assicura, in caso di mancanza di elettricità, un rialzo molto lento della temperatura. La tradizionale alta qualità Cold Master è la migliore assicurazione che potete avere.

Low temperature is often essential both in the laboratories and to conserve special kinds of ice cream. If you wish to preserve fish for Sushi, steady low temperatures are the best warranty in order to maintain a high quality. The ELVT range from Cold Master offers temperatures such as -45°C for freezers from 284 up to almost 500 Lt. The temperature is kept to a constant level and can be easily surveilled thanks to the digital display. The controller can be set and moreover it offers the possibility to add an external alarm. In case of electric blackout, the insulation of 100 mm of polyurethane foam ensures a very slow temperature rise inside. The traditional Cold Master's high quality is the best assurance you can have.



Ampia maniglia con serratura di serie
Large handle with standard lock



Esterno e interno in acciaio verniciato bianco
Outside and inside made of white painted steel



ELVT 150 - 310 - 410:
Ruote di serie
Standard castors



ELVT 510:
Piedini di serie
Standard feet
Centralina elettronica programmabile
in Celsius e Fahrenheit
Control panel programmable in Celsius and Fahrenheit



Watt

°C

H₂O

Lt.

Serie

Max

mm. (LxPxH)

Di serie

-

1

Kg.

NEW ELVT 150

300

230v/1/50Hz

-10/-45

MAN

R404

133

n° 1

n° 3

720x695x885

Di serie

-

1

55

NEW ELVT 310

400

230v/1/50Hz

-10/-45

MAN

R404

284

n° 1

n° 9

1260x695x885

Di serie

-

1

76

NEW ELVT 410

400

230v/1/50Hz

-10/-45

MAN

R404

368

n° 1

n° 11

1560x695x885

Di serie

-

1

88

NEW ELVT 510

550

230v/1/50Hz

-10/-45

MAN

R404

476

n° 3

n° 11

1660x758x890

Di serie

-


1

107

Prezzi vedi a pagina 44
Prices see page 44

Dati di collaudo - Test details - Détails d'essai - Prüfungsergebnisse - Datos de ensayo - MAX = (25°C - % U.R. 60)

SB

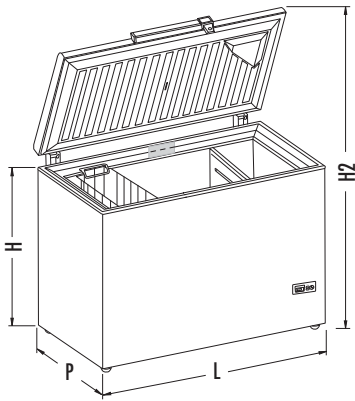

DIMENSIONI / SIZE / DIMENSIONS
MABE / MEDIDAS

	L (mm)	P (mm)	H (mm)	H2 (mm)
SB 200	920	650 (700)	860	930
SB 300	1260	650 (700)	860	930
SB 400	1560	650 (700)	860	930

Basso consumo di energia
Low energy consumption
Consommation d'énergie modérée
Geringer Energieverbrauch
Bajo consumo de energía


Termometro esterno
External Thermometer
Thermomètre extérieur
Aussenthermometer
Termómetro exterior

Spessore isolamento 80 mm.
Insulation thickness 80 mm.
Épaisseur isolation 80 mm.
Isolierung Stärke 80 mm.
Espesor aislamiento 80 mm.



Esterno in acciaio verniciato bianco. Interno in alluminio
Outside made of white painted steel. Inside aluminium
Extérieur en acier peint en blanc. Intérieur en aluminium
Außenfläche aus weißlackiertem Stahl. Innenfläche aus Aluminium
Externo de acero pintado blanco. Interno de aluminio

SE

SE 255

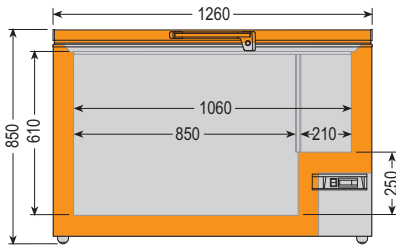

SE 325

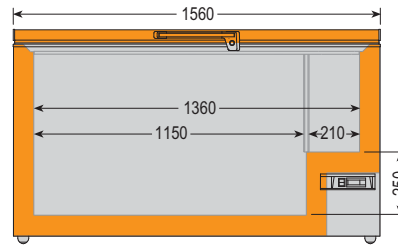

Basso consumo di energia
Low energy consumption
Consommation d'énergie modérée
Geringer Energieverbrauch
Bajo consumo de energía

Esterno in acciaio verniciato bianco. Interno in alluminio
Outside made of white painted steel. Inside aluminium
Extérieur en acier peint en blanc. Intérieur en aluminium
Außenfläche aus weißlackiertem Stahl. Innenfläche aus Aluminium
Externo de acero pintado blanco. Interno de aluminio




Spessore isolamento 100 mm.
Insulation thickness 100 mm.
Épaisseur isolation 100 mm.
Isolierung Stärke 100 mm.
Espesor aislamiento 100 mm.

ELVT

NEW

ELVT 510 Piedini di serie
Standard feet

ELVT 150
ELVT 310
ELVT 410 Ruote di serie
Standard castors

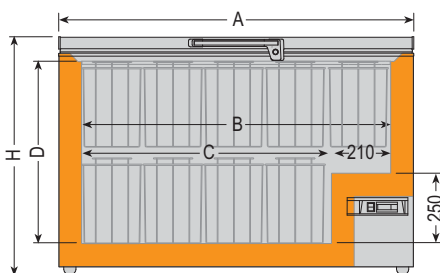

Spessore di isolamento mm. 80
Insulation thickness 80 mm.
Épaisseur d'isolation 80 mm.
Isolierung Stärke 80 mm.
Espesor de aislamiento 80 mm.

Esterno in lamiera verniciata bianco
Exterior in white painted plate
Extérieur en tôle verni en blanc
Aussenseite aus lackiertem weiß Blech
Exterior en chapa barnizada blanco

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
ELVT 150	720	560	350	635	695	440	600	885
ELVT 310	1260	1100	890	635	695	440	600	885
ELVT 410	1560	1400	1190	635	695	440	600	885
ELVT 510	1660	1500	1290	640	758	500	660	890

ONE
OMEGA
professional equipment

<http://www.omegaone.gr> email: info@omegaone.gr

Tel: 0030 2103472270 Fax: 0030 2103476037