

Congelatori industriali / Freezers for the industry / Congélateurs industriels / Gewerbliche-Tiefkühlgeräte / Congeladores industriales

VCI 430



OMEGA ^{ONE}
professional equipment
<http://www.omegaone.gr> email: info@omegaone.gr
Tel: 0030 2103472270 Fax: 0030 2103476037



SURGELATI



GELATI



Cesti di serie
Serial baskets
Paniers de serie
Serien Koerbe
Canastas de serie



	Watt		°C			H ₂ O		Lt.	Serie	Max	mm. (LxPxH)				Kg.
VCI 320	224	230v/1/50Hz	-18/-22			MAN	R 134a	231	n° 4	n° 4	1103x600x830	-	-	1	52
VCI 430	226	230v/1/50Hz	-18/-22			MAN	R 134a	315	n° 5	n° 5	1406x600x830	-	-	1	58
VCI 550	260	230v/1/50Hz	-18/-22			MAN	R 134a	426	n° 6	n° 6	1806x600x830	-	-	1	64





Prezzi vedi a pagina 41
Prices see page 41

Dati di collaudo - Test details - Détails d'essai - Prüfungsergebnisse - Datos de ensayo - MAX = (30°C - % U.R. 55)

PICCOLA ESPOSIZIONE
SMALL DISPLAYS
REFRIGERATORI & CONGELATORI
REFRIGERATORS & FREEZERS
MINIBAR & FARMACIA
MINIBAR & PHARMACY
ARMADI SPECIALI
SPECIAL CABINETS
PASTICCERIA
PASTRY
RISTORAZIONE
CATERING EQUIPMENT
PIZZERIA
PIZZERIA
SUPERMERCATI
SUPERMARKETS
IPERMERCATI
HYPERMARKETS
ATTREZZATURE COMPLEMENTARI al servizio
ADDITIONAL EQUIPMENT'S SERVICE

FIVS

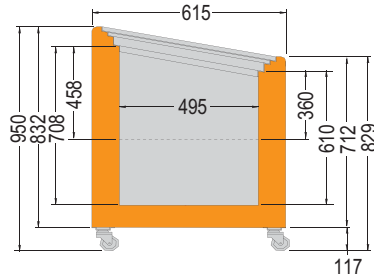

Spessore di isolamento mm. 60
Insulation thickness 60 mm.
Épaisseur d'isolation 60 mm.
Isolierstärke 60 mm.
Espesor de aislamiento 60 mm.

Termometro meccanico esterno
External mechanical thermometer
Thermomètre mécanique externe
Externe Mechanischer Thermometer
Exteriores termómetro mecánico



Esterno in lamiera verniciata bianco
Exterior in white painted plate
Extérieur en tôle verni en blanc
Aussenseite aus lackiertem weiß Blech
Exterior en chapa barnizada blanco

Ruote
Wheels
Roues
Reder
Ruedas

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS	A (mm)	B (mm)
FIVS 200	720	600
FIVS 300	1009	890
FIVS 400	1298	1180
FIVS 500	1548	1430

	Nr. cesti di serie No. serial baskets Nr. paniers de serie Nr. serien Koerbe Nr. canastos de serie	Capacità totale cesti Total capacity of baskets Capacité totale paniers Totale kapazität Koerbe Capacidad total canastos
FIVS 200	-	N° 2 mm. 230x490 h. 200
FIVS 300	-	N° 3 mm. 230x490 h. 200
FIVS 400	-	N° 5 mm. 230x490 h. 200
FIVS 500	-	N° 6 mm. 230x490 h. 200

FIVSC

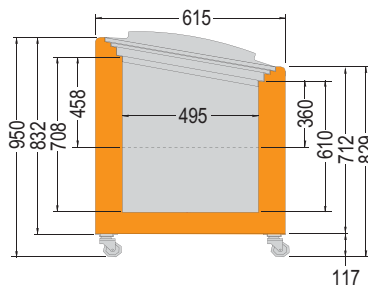

Spessore di isolamento mm. 60
Insulation thickness 60 mm.
Épaisseur d'isolation 60 mm.
Isolierstärke 60 mm.
Espesor de aislamiento 60 mm.

Termometro meccanico esterno
External mechanical thermometer
Thermomètre mécanique externe
Externe Mechanischer Thermometer
Exteriores termómetro mecánico

Esterno in lamiera verniciata bianco
Exterior in white painted plate
Extérieur en tôle verni en blanc
Aussenseite aus lackiertem weiß Blech
Exterior en chapa barnizada blanco



Ruote
Wheels
Roues
Reder
Ruedas

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	B (mm)	A (mm)	B (mm)
FIVSC 200	720	600	FIVSC 400	1298 1180
FIVSC 300	1009	890	FIVSC 500	1548 1430

	Nr. cesti di serie No. serial baskets Nr. paniers de serie Nr. serien Koerbe Nr. canastos de serie	Capacità totale cesti Total capacity of baskets Capacité totale paniers Totale kapazität Koerbe Capacidad total canastos
FIVSC 200	-	N° 2 mm. 230x490 h. 200
FIVSC 300	-	N° 3 mm. 230x490 h. 200
FIVSC 400	-	N° 5 mm. 230x490 h. 200
FIVSC 500	-	N° 6 mm. 230x490 h. 200

VCI



Interno ed esterno in lamiera plastificata bianca
Inside and outside in white metal plastified sheet
Intérieur et extérieur en plaque blanche plastifiée
Innerseite und Outerseite aus weisse Kunststoff-platte
Interior y exterior en chapa blanca plastificada.

Spie di controllo: corrente , congelazione rapida, allarme
Control pilot lamps: current, quick-freezing, alarm
Lampes témoins de contrôle: courant, congélation rapide, alert
Kontrolllampen: Strom, schnelles Gefrieren, Alarm
Pilotos de control: corriente, congelación rapida, alarma



DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
VCI 320	1103	600	830	980	480	670	280	730
VCI 430	1406	600	830	1280	480	970	280	730
VCI 550	1806	600	830	1690	480	1380	280	730

Coperchio anticondensa
Anticodense cover
Couvercle anti-condensation
Antikondensation Deckel
Tapa anticondensación

Termometro interno
Internal Thermometer
Thermomètre intérieur
Innen thermometer
Termómetro interior

FPV

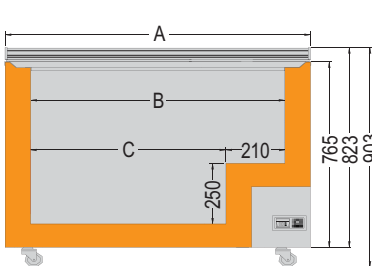

Spessore di isolamento mm. 60
Insulation thickness 60 mm.
Épaisseur d'isolation 60 mm.
Isolierstärke 60 mm.
Espesor de aislamiento 60 mm.

Termometro meccanico esterno
External mechanical thermometer
Thermomètre mécanique externe
Externe Mechanischer Thermometer
Exteriores termómetro mecánico

Esterno in lamiera verniciata bianco
Exterior in white painted plate
Extérieur en tôle verni en blanc
Aussenseite aus lackiertem weiß Blech
Exterior en chapa barnizada blanco

Ruote
Wheels
Roues
Reder
Ruedas

	Nr. cesti di serie No. serial baskets Nr. paniers de serie Nr. serien Koerbe Nr. canastos de serie	Capacità totale cesti Total capacity of baskets Capacité totale paniers Totale kapazität Koerbe Capacidad total canastos
FPV 300	-	N° 3 mm. 230x490 h. 200
FPV 400	-	N° 5 mm. 230x490 h. 200
FPV 500	-	N° 6 mm. 230x490 h. 200

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	B (mm)	C (mm)
FPV 300	1012	890	680
FPV 400	1302	1180	970
FPV 500	1552	1430	1220