

Congelatori industriali / Freezers for the industry / Congélateurs industriels / Gewerbliche-Tiefkühlgeräte / Congeladores industriales

VLC 550


www.omegaone.gr **ONE**
OMEGA
 professional equipment



SURGELATI



GELATI

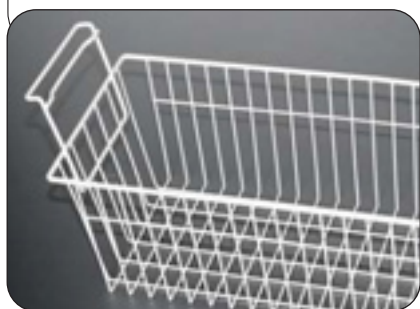

Cesti di serie
 Serial baskets
 Paniers de serie
 Serien Koerbe
 Canastos de serie



Watt



°C




	Watt		°C			H ₂ O		Lt.	Serie	Max	mm. (LxPxH)				Kg.
VLC 320	224	230v/1/50Hz	-18/-22			MAN	R 134a	231	n° 5	n° 5	1100x600x830	-	-	1	52
VLC 430	226	230v/1/50Hz	-18/-22			MAN	R 134a	315	n° 6	n° 6	1400x600x830	-	-	1	58
VLC 550	260	230v/1/50Hz	-18/-22			MAN	R 134a	426	n° 8	n° 8	1810x600x830	-	-	1	64



Prezzi vedi a pagina 41
 Prices see page 41

Dati di collaudo - Test details - Détails d'essai - Prüfungsergebnisse - Datos de ensayo - MAX = (30°C - % U.R. 55)

VLC

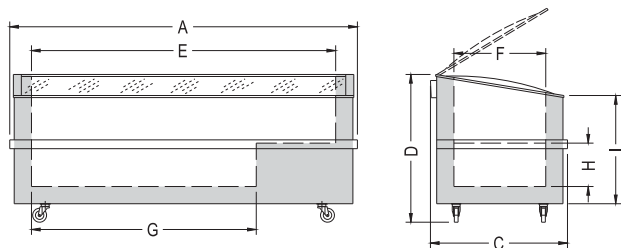

DIMENSIONI / SIZE / DIMENSIONS / MABE / MEDIDAS

	A (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
VLC 320	1100	600	830	980	480	670	280	730
VLC 430	1400	600	830	1280	480	970	280	730
VLC 550	1810	600	830	1690	480	1380	280	730

Interno ed esterno in lamiera plastificata bianca
 Inside and outside in white metal plastified sheet.
 Intérieur et extérieur en plaque blanche plastifiée.
 Innerseite und Outerseite aus weisse Kunststoff-platte.
 Interior y exterior en chapa blanca plastificada.

Spie di controllo: corrente, congelazione rapida, allarme
 Control pilot lamps: current, quick-freezing, alarm
 Lampes témoins de contrôle: courant, congélation rapide, alert
 Kontrollampen: Strom, schnelles Gefrieren, Alarm
 Pilotos de control: corriente, congelación rápida, alarma


Termometro interno
 Internal Thermometer
 Thermomètre intérieur
 Innenthermometer
 Termómetro interior

Cerniere con molla
 Hinges with spring
 Charnières avec ressort
 Scharniere mit Feder
 Bisagras con quelle

Coperchio anticondensa
 Anticondensation cover
 Couvercle anti-condensation
 Antikondensation Deckel
 Tapa anticondensación

AB / ABX

AB 200 / 240 / 300 / 350 / 396 / 425 / 506:

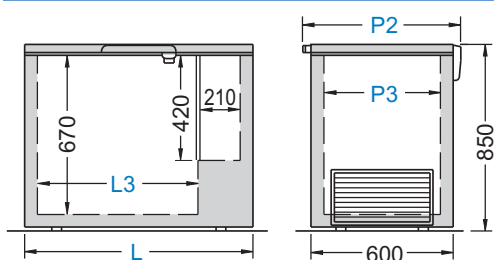


DIMENSIONI

SIZE / DIMENSIONS / MABE / MEDIDAS


	L (mm)	L2 (mm)	L3 (mm)	P2 (mm)	P3 (mm)
AB 200	720	-	410	695	500
AB 240	850	-	540	695	500
AB 300	1020	-	710	695	500
AB 350	1125	-	815	695	500
AB 396	1260	-	950	695	500
AB 425	1370	-	1060	695	500
AB 506	1560	-	1250	695	500
AB 530	1500	1386	1186	730	536
AB 610	1700	1586	1386	730	536
AB 710	1800	1686	1486	770	576

Termometro esterno / External Thermometer
 Thermomètre extérieur / Aussenthermometer / Termómetro exterior

AB 530 / 610 / 710:

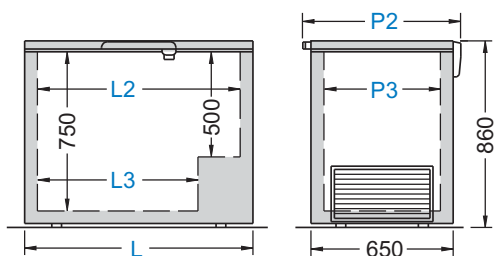

*** AB 108**
 Termometro interno
 Internal Thermometer
 Thermomètre intérieur
 Innenthermometer
 Termómetro interior

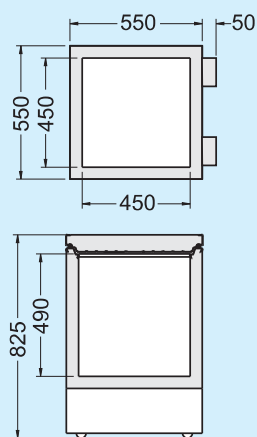

AB 780


NEW

Spessore di isolamento mm. 70
 Insulation thickness 70 mm.
 Epaisseur d'isolation 70 mm.
 Isolierstärke 70 mm.
 Espesor de aislamiento 70 mm.


Termometro esterno
 External Thermometer
 Thermomètre extérieur
 Aussenthermometer
 Termómetro exterior

Esterno in acciaio verniciato bianco. Interno in alluminio
 Outside made of white painted steel. Inside aluminium
 Extérieur en acier peint en blanc. Intérieur en aluminium
 Außenfläche aus weißlackiertem Stahl. Innenfläche aus Aluminium
 Externo de acero pintado blanco. Interno de aluminio


Nr. cesti di serie No. serial baskets Nr. paniers de serie Nr. series Koerbe Nr. canastos de serie	Capacità totale cesti Total capacity of baskets Capacité totale paniers Totale kapazität Koerbe Capacidad total canastos
N° 2 mm. 260x624 h. 260	N° 6 mm. 260x624 h. 260

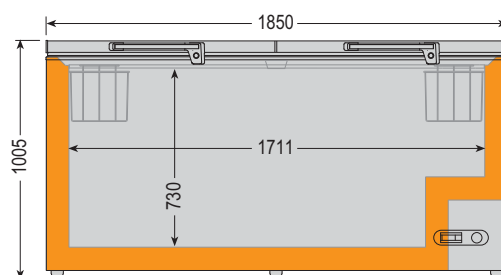

N° 6 rulli di serie
 N° 6 standard rollers



AB 800

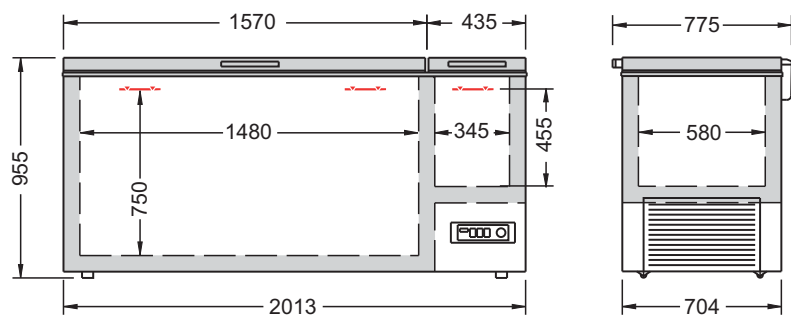

Termometro esterno
 External Thermometer
 Thermomètre extérieur
 Aussenthermometer
 Termómetro exterior